

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 81107275.0

(51) Int. Cl.³: H 04 R 11/02

H 04 R 5/02, H 04 R 1/24

(22) Date of filing: 15.09.81

(30) Priority: 19.09.80 US 188757

(43) Date of publication of application:
31.03.82 Bulletin 82/13

(84) Designated Contracting States:
DE FR GB IT SE

(71) Applicant: Electro-Magnetic Corporation
11th & L Bldg., No. 830 1127 11st Street
Sacramento California(US)

(72) Inventor: Marquiss, Stanley L.
40851 Comptche-Ukiah Road
Mendocino California(US)

(74) Representative: Baillie, Iain Cameron et al.
c/o Ladas & Parry Isartorplatz 5
D-8000 München 2(DE)

(54) Electro acoustic planar transducer.

(57) An electro-acoustic transducer using thin, light-weight, planar diaphragms (13, 14) driven by strategically located, coil driven, high-energy, permanent magnets (41). A framework (12) maintains the diaphragms (13, 14) in substantially co-planar relationship a predetermined distance from and parallel to a rear support wall (16). The diaphragms (13, 14) include at least one hinged woofer diaphragm (13) and a foam-supported tweeter diaphragm (14). The small, high energy movable permanent magnets (41) are attached to the rear surface of each movable diaphragm (13, 14). Cooperating with each movable magnet (41) is a respective, stationary electromagnetic coil (29) with a cross-over network directing the incoming signal to the appropriate coils, thereby placing the magnets (41) and attached diaphragms (13, 14) into cooperating fore and aft motion. The frontal acoustical waves produced by each woofer constructively interfere to augment low frequency response. The tweeter construction provides wide frontal dispersion of high frequency acoustical waves. Woofer backwaves are attenuated before emerging along the rear support wall and the tweeter backwave is vented into a rear isolative chamber.

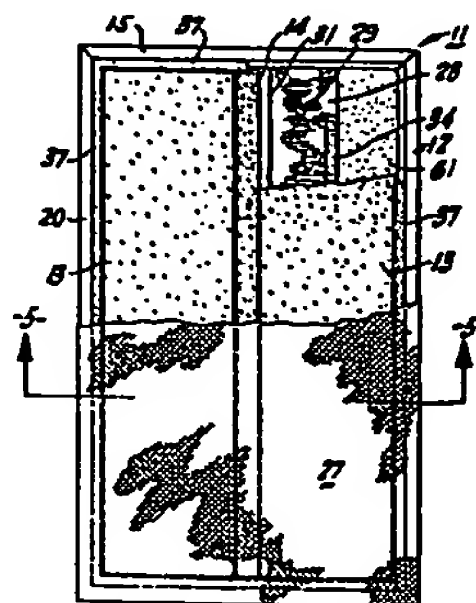


FIG. 1

EP 0 048 434 A1

ELECTRO-ACOUSTIC PLANAR TRANSDUCER

1. FIELD OF THE INVENTION

The invention relates generally to the field of electro-
5 acoustic transducers, or loudspeakers, using planar elements,
or diaphragms.

More specifically, the invention relates to a thin loud-
speaker system using planar diaphragms fashioned from rigid,
lightweight panels. The particular configuration allows the
10 speaker system to be mounted directly upon a support wall, or
the like, in such a way that the loudspeaker system and the wall
cooperate in an acoustically advantageous manner.

The invention also relates to an improved combined station-
ary coil and moving magnet electromagnetic drive assembly for
15 the lightweight planar diaphragms, utilizing state of the art
magnetic material having an extremely high energy product.

2. DESCRIPTION OF THE PRIOR ART

From the standpoint of a design ideal, the mechanical
resistance, or impedance, of the air impinging upon the dia-
20 phragm of an electro-acoustic transducer should form an apprec-
iable portion of the total electrical impedance which the trans-
ducer presents to the electrical driving energy source. This
ideal electro-acoustic transducer, then would effect an efficient
couple, or match, between the electrical energy source and the
25 mechanical load which the air presents to the acoustical wave
producing diaphragm. Additionally, with a high coefficient of
acoustical coupling, the performance of the transducer would
become highly predictable. In other words, with the surround-
ing air mass comprising a substantial, stable, and frequency-
30 independent load for the transducer, the vagaries in acoustical
response introduced by transducer enclosures and spatial place-
ment can be minimized.

Since air is a light and subtle medium, an acoustical
diaphragm must engage a large number of air molecules to produce
35 a reasonable sound level. It is apparent, that a planar dia-

phragm, which by its nature is capable of presenting a large surface area to the surrounding air, should be an efficient means for coupling to, and placing into motion, a large mass of air. Owing to its high coefficient of acoustical coupling, a large
5 planar diaphragm need not make large and rapid excursions to create a substantial sound level. Making limited and relatively slow excursions, a planar diaphragm is able to avoid the acoustical incongruities characteristic of a conventional cone-shaped diaphragm.

10 Restricted by constructional considerations to a relatively small maximum size, a cone-shaped loudspeaker must make large and rapid axial excursions to produce an acceptable level of sound pressure. That is to say, since the cone diaphragm cannot directly couple a large mass of air, it must compensate by
15 quickly displacing what air it does engage a considerable distance to reproduce sound at satisfactory levels.

As a result of this basic requirement of a large cone excursion, a number of well known electrical and mechanical problems arise with a conventional moving coil, cone-shaped
20 loudspeaker. The speaker's moving coil, attached directly to the cone, creates a motion-related inductive reactance, or back EMF, which is directly related to the heightened distance and speed through which the coil must move each cycle. This dynamic back EMF, in turn, causes peaks and dips in speaker response
25 which vary with overall speaker amplitude.

When the moving coil exerts translational force to the peak portion of the suspended cone diaphragm, irregularities in the cone's mechanical response occur. Unable to respond to the applied force in linear fashion, the wobbling cone creates skewed
30 wave fronts which interfere to the detriment of a smooth acoustical response.

A more subtle acoustic deficiency is inherent with the large diaphragm excursions characteristic of cone speakers. To maintain compliance with a given input waveform, the cone diaphragm must also travel faster than a planar diaphragm, since
35 the former is being displaced a greater distance. At high volume levels, when excursions are the greatest, the cone moves so

fast that the displaced air is highly compressed, causing a veiled, but still perceptible aural distortion, or breakup. The planar diaphragm with its less drastic movement is free from this compressive distortion of the air.

5 While the planar diaphragm has the potential to overcome many of the inherent deficiencies of the cone shaped diaphragm, as previously indicated, the prior art relating to planar loudspeakers has not solved several remaining problems, as will now be explained.

10 Planar diaphragms, as all other diaphragms, physically oscillate in response to the input waveform, producing both a front and a rear wavefront. If the rear of a planar diaphragm loudspeaker system is placed near a wall, or other reflective surface, the backwave will be returned to interfere acoustically
15 with the front wave. This acoustic interference will produce amplitude peaks and valleys at varying frequencies, making linear response of the system impossible. Additionally, a portion of the reflected backwave will impinge upon the radiating diaphragm itself, resulting in unwanted mechanical and electrical
20 reactances. While these adverse effects can be lessened, to some extent, by placing the system some distance from the rear wall, such placement is physically impractical or esthetically undesirable in many installations.

 Most of the loudspeakers having planar diaphragms use dia-
25 phragm driving assemblies which are inherently mismatched to the source. The electrostatic driver, for instance, requires a step-up transformer having a large inductive reactance component. This substantial inductive reactance imposes both a load problem for the driving source and a limitation upon the
30 high frequency response of the system. Thus, within the known prior art associated with planar diaphragm loudspeakers, considerable room for improvement exists both in the treatment of the "backwave problem" and in the electro-mechanical means for driving the planar diaphragm.

35 SUMMARY OF THE INVENTION

 The present invention turns away from the conventional

approach to creating an acoustical wave using a planar diaphragm. While most loudspeakers using planar diaphragm construction use a single wave-producing diaphragm, the use of a segmented, or divided, planar diaphragm arrangement is not unknown. A
5 large planar diaphragm is commonly used for reproducing the low frequencies while a more mobile, small planar diaphragm generates the high frequencies.

However, although segmented planar diaphragm per se are not new, the particular configuration disclosed herein accomplishes
10 considerably more than merely reproducing low and high frequency acoustical wave forms. The segmented planar diaphragm of the present design allows the entire system to be mounted directly upon a wall or other planar support surface. Portions of the backwaves of the woofer diaphragms are strategically vented
15 through lateral slots or apertures between the loudspeaker's main frame and the wall, turning an acoustical problem into an acoustical asset. That is to say, the loudspeaker and the rear positioned wall cooperate to acoustical advantage.

As a further result of the woofer diaphragm configuration,
20 the low frequency front waves interfere constructively to produce an augmented, in phase, wavefront. The placement and construction of the tweeter diaphragm further provide excellent high frequency dispersement while minimizing unwanted interaction with low frequency waves.

25 The woofer and tweeter planar diaphragm combination is housed within an extremely thin framework. Thus, the configuration allows a slender loudspeaker construction which is attractive and unobtrusive when placed upon a support wall.

The means for driving the lightweight planar diaphragms
30 uses rare earth, samarium cobalt, moving magnets, rather than a conventional moving coil design. Having an extremely high energy product, the moving magnets can be reduced in size and weight, thereby decreasing the dynamic mass and inertia of the drive system compared with a moving coil type drive system.

35 The plurality of stationary driving coils for each diaphragm is connected in parallel, presenting a resultant low impedance, low reactance load to the driving source.

As a consequence, the drive system for the diaphragms is ideally suited for a maximum transfer of energy over a wide frequency spectrum, in contrast to known prior art.

Thus is an object of the present invention to provide
5 an improved electro-acoustic transducer using a segmented, or divided planar diaphragm construction.

It is another object to provide a thin, planar loudspeaker system which is mounted directly upon and cooperates acoustically with a wall or other supportive planar surface.

10 It is yet another object to provide an improved electromagnetic means for driving planar diaphragm elements using a plurality of high energy product magnets in conjunction with respective, stationary magnetic coils.

It is still a further object of the invention to provide a
15 generally improved electro-acoustic planar transducer.

These and other objects of the present invention are illustrated in the accompanying drawings and described in the detailed description of the preferred embodiments to follow.

BRIEF DESCRIPTION OF THE FIGURES

20 Figure 1 is a front elevational view of one form of the transducer of the invention, with a portion of the grill cloth broken away to reveal the segmented planar diaphragm construction having a vertical central tweeter straddled by a pair of vertical woofers, and with a portion of the woofer diaphragm
25 broken away to reveal interior structural details;

Figure 2 is a rear elevational view thereof, to an enlarged scale, with the upper portion of one of the lateral perforated cages broken away to show the underlying sound alternating cell formed of layers of sound absorptive material,
30 and with portions of the transparent rear plate and the front mounting plate broken away to reveal a portion of the woofer diaphragm located on the front, or outer, portion of the device;

Figure 3 is an elevational view of one side, showing the invention mounted upon a wall or other supportive planar surface;

35 Figure 4 is a top plan view thereof;

Figure 5 is a transverse, cross-sectional view, to an enlarged scale, taken on the plane indicated by the line 5-5 in

Figure 1;

Figure 6 is a fragmentary sectional view, to a greatly enlarged scale, of a single combined push-pull coil and moving magnet drive assembly of a woofer diaphragm, the non-conductive mounting plate being broken away to show the core and magnet extension more clearly;

Figure 7 is a schematic representation of the crossover network circuitry and interconnected array of woofer and tweeter push-pull drive coils;

Figure 8 is a front elevational view of an alternative preferred embodiment of the invention with a portion of the grill cloth broken away to reveal the single woofer and the single tweeter planar diaphragms;

Figure 9 is a rear elevational view of the embodiment of Figure 8; and,

Figure 10 is a cross sectional view, to an enlarged scale taken on the plane indicated by the line 10-10 in Figure 8.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With particular reference to Figures 1-7 of the drawings, a preferred embodiment of the invention 11 generally comprises a rectangular, picture-like frame 12 encompassing two planar woofer diaphragms 13 straddling a single planar tweeter diaphragm 14. The frame 12 includes a pair of horizontal rails 15 and a pair of vertical side pieces 20 and is built to maintain the two woofer diaphragms 13 and the tweeter diaphragm 14 in co-planar relation a predetermined distance from and parallel to a room wall 16, or other planar surface. Figures 2, 3 and 4 best show a pair of vertically oriented ribs 17, extending between and attached to the top and bottom rails 15 and serving to space the rear face of the frame 12 approximately 1" from the wall 16. A lateral slot 18, or aperture, is thereby defined, extending around the periphery of the inner, or after, side of the frame 12. The acoustic function of the slot 18 will subsequently be explained in detail.

The frame 12 also includes a horizontal upper brace 19 and a horizontal lower brace 21 extending between and attached to the ribs 17. Secured, in turn, to the upper brace 19 and the lower

-7-

brace 21 are upper and lower resilient metal support plates, 22 and 23, respectively. The lower, rearwardly projecting lip of each support plate is provided with a vertical upwardly extending notch 24. As shown in Figures 3 and 4, two vertically aligned screws 26 protrude a short distance from the wall 16 and register with respective notches 24 as the invention 11 is readied for final positioning. The frame 12 is then slightly pressed rearwardly against the wall resiliently to compress the projecting lower lip of the support plates 22 and 23 and simultaneously urged downwardly to lodge the shank of each screw 26 in its respective notch 24. The resiliency of the support plates biases the ribs 17 into firm face to face engagement with the wall 16 and securely positions the device in its desired location.

The configuration of the two planar woofer diaphragms 13 and the single, central planar tweeter diaphragm 14 is most clearly illustrated in Figure 1. While only a portion of the grill cloth 27 has been removed in Figure 1, the conjugate placement and relative proportions of the three diaphragms are readily apparent. Each woofer diaphragm 13 conveniently measures approximately ten inches wide and thirty eight inches high while the dimensions of the tweeter diaphragm 14 are approximately one and one half inches wide by thirty eight inches high. These diaphragm dimensions result in a total diaphragm radiating surface area of slightly less than six square feet. The standard thickness of each diaphragm panel is 1/4" which has been determined to be a satisfactory compromise between the rigidity and weight requirements to practice the present invention.

As will be explained more fully herein the diaphragms must be sufficiently rigid to avoid flexure oscillations yet light enough to ensure efficient and agile operation. It is also desirable that the diaphragms be constructed from a non-conductive material, since they are positioned in close proximity to magnetic and electro-magnetic fields created by the particular diaphragm drive mechanism employed herein. A product ideally suited to satisfy these weight, composition and rigidity requirements is sold under the trademark KLEGECELL #33, by American Klegecell Company. KLEGECELL #33 is a substantially

rigid, polyvinylchloride material which is lightweight (2 pounds per cubic foot), non-conductive, and acoustically impermeable.

Having satisfied the design philosophy requirement of engaging a large mass of air, the lightweight planar diaphragms of the present design further assume a particular configuration which makes constructive use of the front and backwave which each planar panel creates. That is to say, the present invention not only uses a multiple planar diaphragm construction, but also supports these diaphragms in a manner and in a spatial correlation which optimizes their acoustical performance.

A sheet 28, or front mounting plate, constructed of a plastic, or other electrically insulative material, bridges the front or outer edges of the two parallel vertical ribs 17 (see Figures 2 and 5) and forms a non-conductive plate upon which both the diaphragms and the plurality of stationary, push-pull drive coils 29 are mounted.

Attached, in turn, to the front or outer surface of the mounting plate 28 are two parallel vertical wooden slats 31 extending the full vertical length of the diaphragms. As can be seen most clearly in Figure 5, the rear surface of the adjacent vertical marginal portion of each of the woofer diaphragms 13 is secured to the front or outer surface of the respective underlying slat 31. Thus, each woofer diaphragm 13 is edge-secured along its adjacent or proximal extremity 32 to the respective underlying slat 31. Owing to the limited pliancy of the diaphragm material, the remaining free portion of each of the woofer diaphragms 13 is able to pivot within limits about the stationary inner edge in a reciprocating fore and aft motion. Maximum excursion of the woofer diaphragms 13, then, will occur at their respective opposites or distal, or movable, extremities 33 (see Figure 5).

Interposed between and attached to the rear, approximate middle portion of each of the woofer diaphragms 13 and the underlying lateral extremities of the mounting plate 28, is a respective vertically elongated foam cushion 34 (See Figures 1 and 5). Each cushion 34 extends the entire vertical dimension of the woofer diaphragm 13 and acts as a light buffer or

-9-

"normalizing spring" for the fore and aft excursions made by the woofers. The nature of this foam cushion is such that each woofer diaphragm 13 is entirely free to make its maximum peak-to-peak excursion of 1/16", or so, at this point, yet a limited
5 resiliency or restorative force is offered as well.

Also mounted upon the plate 28 is the tweeter diaphragm 14. As shown most clearly in Figure 1, the tweeter diaphragm 14 is also vertically oriented and forms a relatively narrow band positioned between the adjacent lateral ends 32 of the two
10 woofer diaphragms 13. The tweeter diaphragm 14 is attached to the plate 28 with a coextensive foam strip 36. The strip 36 is constructed from an extremely compliant foam material identical to that used for the foam cushion 34. This foam material is capable of maintaining the tweeter diaphragm 14 in operative
15 position, yet is sufficiently compliant to allow unimpeded fore and aft excursions of the tweeter relative to the fixed mounting plate 28. As opposed to the pivoted, or hinged, fore and aft motion of the woofer diaphragms 13, the entire tweeter diaphragm 14 makes linear, or integrated forward and rearward
20 excursions.

A foam surround 37, or border strip, forms a diaphragm periphery, extending along a recessed inner shelf 38 of the frame 12 (see Figures 1 and 5). The surround 37 is constructed from a very pliant and acoustically impervious foam material.
25 Diaphragm freedom of movement as well as a reasonably tight acoustical seal between the diaphragms and the frame 12 are thereby afforded.

With particular reference to Figure 6, a combined fixed coil and moving magnet drive assembly 39 is revealed. All of
30 the drive assemblies 39 used to drive the diaphragms 13 and 14 are identical, with four vertically collinear drive assemblies 39 being used for each diaphragm. Figure 2 most clearly shows the three vertical rows of the drive coils 29 of the combined drive assemblies 39, each lateral row corresponding to one of
35 the woofer diaphragms 13 and the central row corresponding to the tweeter diaphragm 14.

Each drive assembly 39 generally comprises the stationary

push-pull drive coils 29, a moving magnet 41, and a magnet extension 42 secured at its after end to the forward surface of the magnet 41 and at its forward end to the back of the woofer diaphragm 13. The coaxially stacked, push-pull drive
5 coils 29 are wound upon an insulative coil form 43, attached to the immobile mounting plate 28. The form 43 includes a hollow, right cylindrical core 44 within which the moving magnet 41 is coaxially positioned for push-pull translation.

The magnet extension 42, constructed from a light yet
10 rigid foam material, performs the dual function of maintaining the magnet 41 in proper position within the core 44 and of transferring the fore and aft motion of the magnet to the diaphragm. The neutral, or "at rest", or centered position for the moving magnet 41 is within the general area between the forward coil
15 46 and the rearward coil 47. A through bore 50 is provided in the fixed mounting plate 28 for unimpeded travel of the magnet extension 42 as the extension 42 moves in unison with the magnet 41 in response to coil actuation.

The moving magnet 41 is of the recently developed rare-
20 earth, samarium cobalt variety. Providing an extremely high energy product (the product of flux density and magnetizing force) on the order of 20 mega-gauss oersted, the samarium cobalt magnetic material is sold under the trademark INCOR 20, by the Indiana General Company of Valparaiso, Indiana, and has
25 proved to be an eminently satisfactory material for the moving magnet 41.

Owing to the high energy potential of INCOR 20, a small and therefore lightweight magnet 41 can provide the necessary driving force to obtain the full potential of the present invention.
30 Typically, the magnet 41 would be in the form of a circular disc, 0.525" in diameter, 0.190" in height, and 5.7 grams in weight. The stationary drive coil 29 in combination with the light weight, high energy product moving magnet 41 provides an efficient drive mechanism yet one which adds very little mass to the
35 driven diaphragms.

By significantly reducing the mass of the dynamic driving

-11-

component in this manner, the moving magnet drive assembly 39 of the preferred embodiments allows the woofer diaphragms 13 and the tweeter diaphragm 14 to be more acoustically loaded, than mass loaded. That is to say, the mechanical resistance of the driven air, as opposed to the mass of the bulky moving coil drive mechanism of conventional design, forms a considerable component of the overall electrical resistance which the system presents to the power source. In short, the high energy moving magnet drive mechanism is ideally matched to fulfill the design philosophy of an acoustically loaded, electro-acoustic transducer.

Interposed between the forward coil 46 and the rearward coil 47, the moving magnet 41 is subjected to the complementary push-pull magnetic forces which the coils create. The resultant fore and aft motion of the magnet 41 is transferred directly through the rigid extension 42 to the forward positioned diaphragms. The moving magnet's maximum excursion is approximately $1/32$ ", or $1/16$ " peak to peak, ensuring adequate coupling with both coils 46 and 47 throughout normal operating range.

Having discussed the combined fixed coil and moving magnet drive assembly 39 in structural and operational aspects, the interconnections between the individual push-pull drive coils 29 and the crossover network circuitry 54 will now be described.

Figure 6 illustrates the physical layout of the interconnected push-pull drive coils 29, including a "positive" input leg 48 and a "negative" input leg 49.

With reference to circuit diagram Figure 7, the parallel interconnections between the plurality of drive coils 29 shunting the legs 48 and 49 are shown in schematic fashion. Given a characteristic impedance of approximately 5 ohms per individual coil 46 or 47, the resultant load presented with all the coils 29 connected in parallel is considerably less than one ohm. With all of the coils so connected, the inductive reactance is similarly reduced to a very low ohmic value.

-12-

The power source, or signal, is fed directly across the transducer input terminals 51, thereby providing the woofer coil assembly 52 with the full range of audio frequencies. The tweeter coil assembly 53, however, is fed in parallel by cross-
5 over network circuitry comprising two crossover legs 54.

Each crossover leg 54 includes a 16 mfd capacitor 56 in parallel with a 6 ohm 55 watt resistor 57. The capacitor 56 provides a 6 db per octave attenuation in frequencies below 5 kilohertz to ensure that the tweeter coil assembly 53 substantially receives the range of audio frequencies which can reproduce faithfully. Since the capacitor 56 induces a phase shift of 90° between the signal's voltage and current components, the resistor 57 is included in order to "bleed over" a portion of the signal to the tweeter coil assembly 53. In this manner,
15 the tweeter diaphragm is "set up" for the incoming signal and phase shift discontinuities between the woofer and tweeter diaphragm responses are minimized.

It should also be noted that while all of the drive coils 29 are shown interconnected in a parallel configuration, a series-
20 parallel configuration may be desirable in some instances to raise the characteristic impedance which the power source "sees" effecting a better source to load match. Since proper performance of the woofer diaphragms 13 requires that they be driven in phase, a series-parallel configuration would require that
25 the interconnections among the four coils 29 driving each woofer diaphragm 13 be identical.

In the preferred embodiments of the invention, all of the woofer and tweeter push-pull drive coils 29 are connected in parallel, and therefore the respective diaphragms 13 and 14 are driven
30 in phase. That is to say, considering the woofer diaphragms 13 in the first instance, the two planar diaphragms 13 pivot, or hingeably move, or swing, about their respective, frame attached, adjacent extremities 32 in synchronous fore and aft fashion. As previously explained, although the material from which the
35 diaphragms 13 are constructed is substantially rigid, the 1/4" thick diaphragms do exhibit sufficient pliancy to permit the required diaphragm excursion. It should be noted, however, that

if the diaphragm material were too pliant, unwanted flexure oscillations would create distorted wave fronts.

The diaphragms 13 are driven at a point slightly less than midway between their respective proximal and distal extremities 32 and 33, as shown Figure 5. It will be appreciated that the proper driving point for the woofer diaphragms from their attached proximal extremity 32 will depend upon a number of variables, namely, the mass of the diaphragm 13, the energy product of the magnet 41, the configuration of the driving coil 29, and the calculus for determining the optimum excursion and velocity for a given diaphragm size and material. As the driving point is moved closer to the diaphragm's attached proximal extremity 32, an increase in diaphragm excursion and velocity should be experienced. Beyond a certain point, however, the "effective" levered mass of the woofer diaphragm 13 will overtax the capabilities of the drive mechanism to respond accurately to the input waveform. If the driving point were moved closer to the diaphragm's movable, or distal extremity 33, the dynamic response of the diaphragm would be improved; but the lack of adequate diaphragm excursion may result in an unusable sound pressure level. Therefore, taking into consideration the relevant variables, a satisfactory compromise between dynamic and amplitude responses can readily be reached by one skilled in the art.

With the two woofer diaphragms 13 driven forwardly in phase, two frontal waves are produced which interfere constructively in the listener's area in front of the speaker. The nature of the frontal wave produced by each diaphragm 13 is such that the wave amplitude decreases from the movable, distal extremity 33 to the attached, proximal extremity 32. Nonetheless, since the planar diaphragms themselves are substantially rigid and remain substantially planar as they pivot, the phase relationship of the resultant wavefront is maintained regardless of the frequency or amplitude of the incoming drive signal. The constructive interference of the two in-phase, frontal waves, in other words, produces an augmented amplitude response which is independent of

variations in the drive signal's frequency or amplitude.

It should be noted that while the front mounting plate 28 is preferably constructed from an acoustically impermeable material, such as wood, or plastic, its position relative to the diaphragms 13 assures that as the diaphragms 13 reverse direction and travel rearwardly, no significant acoustic reactance is thereby introduced. Owing to the pivoted configuration of the woofer diaphragms 13, the extent of the excursion of the diaphragms 13 between the foam cushion 34 and the fixed proximal extremity 32 is relatively small. In other words, the amplitude of the back wave generated in this region is weak, and its inability to vent through the plate 28 does not adversely load the diaphragms 13.

In the region between the foam cushion 34 and the distal movable extremity 33, however, the amount of the excursion and the velocity of the diaphragms 13 increase considerably. The acoustic slot 18, previously described, served to vent, primarily laterally, the backwave produced by the more extensive rearward excursions of the woofer diaphragms 13. While the slot 18 extends completely around the frame 12, the lateral portions of the slot 18 pass the bulk of the backwave owing to the manner in which the backwave is generated, as with the frontal wave, the amplitude peak of the backwave is found along the lateral distal extremities 33 of the diaphragms 13. The backwave readily vents, then, through the subjacent lateral portions of the slot 18.

An acoustically absorptive cell 58, comprises a perforated cage 59, two spaced layers of DACRON 61, and a single filler layer of FIBERGLASS 62. As is best shown in Figure 5, the cage 59 supports and contains the DACRON 61 which surrounds the FIBERGLASS 62. The cage 59 is glued or epoxied into the respective shallow grooves 55 and 60 in the frame 12 and the ribs 17.

It is well known in the art that DACRON material is effective in absorbing the mid and low-midrange frequencies, while FIBERGLASS material is equally well suited for absorbing low range audio frequencies. In the range of frequencies which the woofers are designed to reproduce, namely from 20 Hz to 5 KHz, the cell 58 including the triple layer of DACRON-FIBERGLASS-DACRON serves to reduce the amplitude of the backwave by approximately 10 decibels.

The attenuated backwave generated by both of the woofer diaphragms 13 will vent laterally along the slot 18, or channel, adjacent the wall 16, upon which the device is mounted. The backwave thus does not reflect off the rear positioned wall 16 to impinge destructively upon the diaphragm as with prior art planar transducers which may be similarly positioned near a rear wall. Rather, the backwave is directed to cooperate acoustically with the wall 16 to enhance the dispersion and amplitude of audio frequencies below 5 KHz produced by the diaphragms 13. And, since the diaphragms 13 are so close to the wall 16, the frontal wave and the laterally vented backwave will reach the listener in nearly perfect phase relationship.

Turning now to the operation of the tweeter diaphragm 14, the narrow vertical diaphragm is placed into front and rear motion by the middle, vertical row of four push-pull drive coils 29 and the respective high energy moving magnets 41. A small, circular cutout 63, as is best shown in Figure 5, is provided to pass each of the magnet extensions 42 through the foam strip 36. Owing to the extreme compliancy of the foam strip 36, the low mass tweeter diaphragm 14 is free to make its rapid, but relatively short, front and rear excursions for optimum acoustic response.

A plurality of vertically aligned relief ports 64 (see Figure 2) is provided in the front plate 28 to allow the high frequency backwave, produced by the rearward thrust of the tweeter diaphragm 14 against the foam strip 36, to pass into a chamber 66 defined by a rear plate 67 which extends across and joins the after side portions of the ribs 17. By allowing the relatively small amplitude backwave of the tweeter diaphragm 14 to exit freely through the relief ports 64 into the chamber 66, the tweeter is provided with a backwave release while being protected from the woofer backwave.

As an alternative embodiment, in a more simplified configuration, a single woofer planar diaphragm in combination

with a single tweeter planar diaphragm is shown and briefly explained herein. Since the structural details and operation of this alternative embodiment are nearly identical to that of the preferred embodiment, the differences rather than the
5 apparent similarities will be emphasized.

The reference numerals used to identify particular structural elements of the alternative embodiment will be identical to those used in describing the identical or similar elements in the embodiment previously described, but with the numeral 1
10 as a prefix.

Turning, then, to Figures 8, 9 and 10, the alternative preferred embodiment III of the invention is illustrated. The embodiment III is chiefly distinguishable in having but a single planar woofer diaphragm 113. In Figure 8, a "left hand" speaker
15 er is shown. A "right hand" speaker, not shown, is substantially a mirror image thereof. From the listener's front reference point of view, in other words, the right hand speaker would have its woofer diaphragm 113 on the far right and its tweeter diaphragm 114 positioned adjacent the tweeter diaphragm 114 of the
20 left hand speaker. Owing to the unique mode of woofer cooperation, as will now be explained, the alternative embodiment III is chiefly designed for dual speaker, or stereophonic operation.

Since there is generally little channel separation in low
25 frequency stereo program material, the woofer drive coils 129 in the left hand and right hand speakers will be fed substantially the same signal to be reproduced. In a manner analogous to the frontal wave cooperation between the mirror twin woofer diaphragms 13 in Figure 1-7 form of device, the woofer diaphragms 113 in a left hand and right hand stereo configuration
30 of the alternative embodiment III, cooperate acoustically. That is to say, the low frequency frontal waves produced by the woofer diaphragms in the left hand and the right hand speakers will constructively interfere to a considerable extent as
35 the in phase frontal waves reach the listener.

The tweeter 114 in the alternative preferred embodiment III is offset from the central vertical longitudinal axis of

the frame 112, as can best be seen in Figures 8 and 10. To minimize unwanted reflections of high frequency wave fronts, a planar spacer 168 is interposed between the rib 117 adjacent the tweeter 114, and the adjacent sidepiece 120 of the frame 112. The spacer 168 establishes a fixed distance of approximately four inches to five inches from the closest edge of the tweeter diaphragm 114 to the adjacent sidepiece 120. At the frequencies which the tweeter is designed to reproduce, from 5 KHz to beyond 20 KHz, the distance is sufficient to isolate the tweeter from the potentially harmful acoustical effects of the frame 112.

In all other material respects of construction and operation, the alternative embodiment III is identical to that of the preferred embodiment.

15 While the preferred embodiments of the invention II use rectangular planar diaphragms 13 and 14, a number of other shapes and configurations will be apparent to one skilled in the art. For instance, the planar diaphragms could be made in the form of squares, triangles, circles or other geometric 20 forms without deviating from the spirit of the invention. Also, additional planar diaphragms could be included in alternative embodiments, For example, top and bottom woofer diaphragms could easily supplement the lateral woofer diaphragms of the preferred embodiment. Hexagonal or octagonal arrays of planar diaphragms are similarly envisioned as possible variant arrangements. 25

CLAIMS

1. An electro-acoustic planar transducer comprising:
a substantially planar frame having a front side and a rear side; a planar woofer diaphragm; means for mounting said woofer diaphragm on and parallel to said frame for alternating movement toward and away from said front side and said rear side and cooperating coil and magnet means interposed between said frame and said woofer diaphragm for driving said woofer diaphragm in response to an impressed electrical signal.
2. A transducer as in claim 1, including a planar tweeter diaphragm, means for mounting said tweeter diaphragm on and parallel to said frame for alternating movement toward and away from said front side and said rear side, and cooperating coil and magnet means interposed between said frame and said tweeter diaphragm for driving said tweeter diaphragm in response to said impressed electrical signal.
3. A transducer as in claim 1, in which said cooperating coil and magnet means includes a plurality of aligned drive coils mounted on said frame with the coil axis normal to said frame, and a plurality of high energy magnets mounted on said diaphragm for coaxial fore and aft movement of said magnets relative to said coils.
4. A transducer as in claim 1, 2 or 3, including means for mounting said frame on a vertical planar surface so that said rear side faces toward the planar surface and said front side faces away from the planar surface, and sound absorptive means mounted on said frame and interposed between at least one predetermined portion of said woofer diaphragm and said planar surface for attenuating the acoustic back waves generated by said predetermined portion of said woofer diaphragm.
5. A transducer as in claim 1, 2, 3 or 4, wherein said planar woofer diaphragm is rectangular and, with the

long dimension of said woofer diaphragm in vertical attitude, has one proximal vertical edge mounted on said frame, the opposite distal vertical edge of said woofer diaphragm being movable and partaking in excursions of intermediate extent as said woofer diaphragm is driven.

6. A transducer as in claim 2 in which said planar tweeter diaphragm is straddled by a pair of said planar woofer diaphragms.

7. A transducer assembly comprising a pair of transducers as in claim 2, in which said woofer and said tweeter diaphragms are arranged in mirror symmetry so that said tweeter diaphragms are adjacent each other and said woofer diaphragms are remote from each other.

8. A transducer as in claim 1, including a pair of said planar woofer diaphragms which are lightweight and substantially rigid, a lightweight substantially rigid, planar tweeter diaphragm; said rear side being adapted to face toward a planar surface, said mounting means mounting said woofer diaphragms and said tweeter diaphragm on said frame in co-planar relation a predetermined distance from the planar surface of predetermined width to form a channel around the periphery of said diaphragms, said woofer diaphragms being attached to said frame at their adjacent proximal edges allowing unimpeded front and rear motion of their respective distal edges, and said coil and magnet means being mounted on said frame and interconnected to said woofer diaphragms a predetermined distance from said adjacent proximal edges of said woofer diaphragms for placing said woofer diaphragms into front and rear motion about their respective proximal edges in response to an electrical drive signal, said coil and magnet means being further interconnected to said tweeter diaphragm for placing said tweeter diaphragm into front and rear motion in accordance with a supplied electrical drive signal.

9. A transducer as in claim 8, including a pair of pieces of highly compliant material interposed between and attached to said frame and said woofer diaphragms and a piece of highly compliant material interposed between and attached to said frame and said tweeter diaphragm, said material being yieldable to permit fore and aft motion of said diaphragms relative to said frame.

10. A transducer as in claim 8 or 9, in which said peripheral channel underlies the distal edge portion of each of said woofer diaphragms and acoustically vents the backwaves generated thereby in a lateral direction, the intent of said predetermined channel width being selected so that the laterally vented backwave and the frontal wave generated by said woofer diaphragm advance in substantially perfect phase relationship.







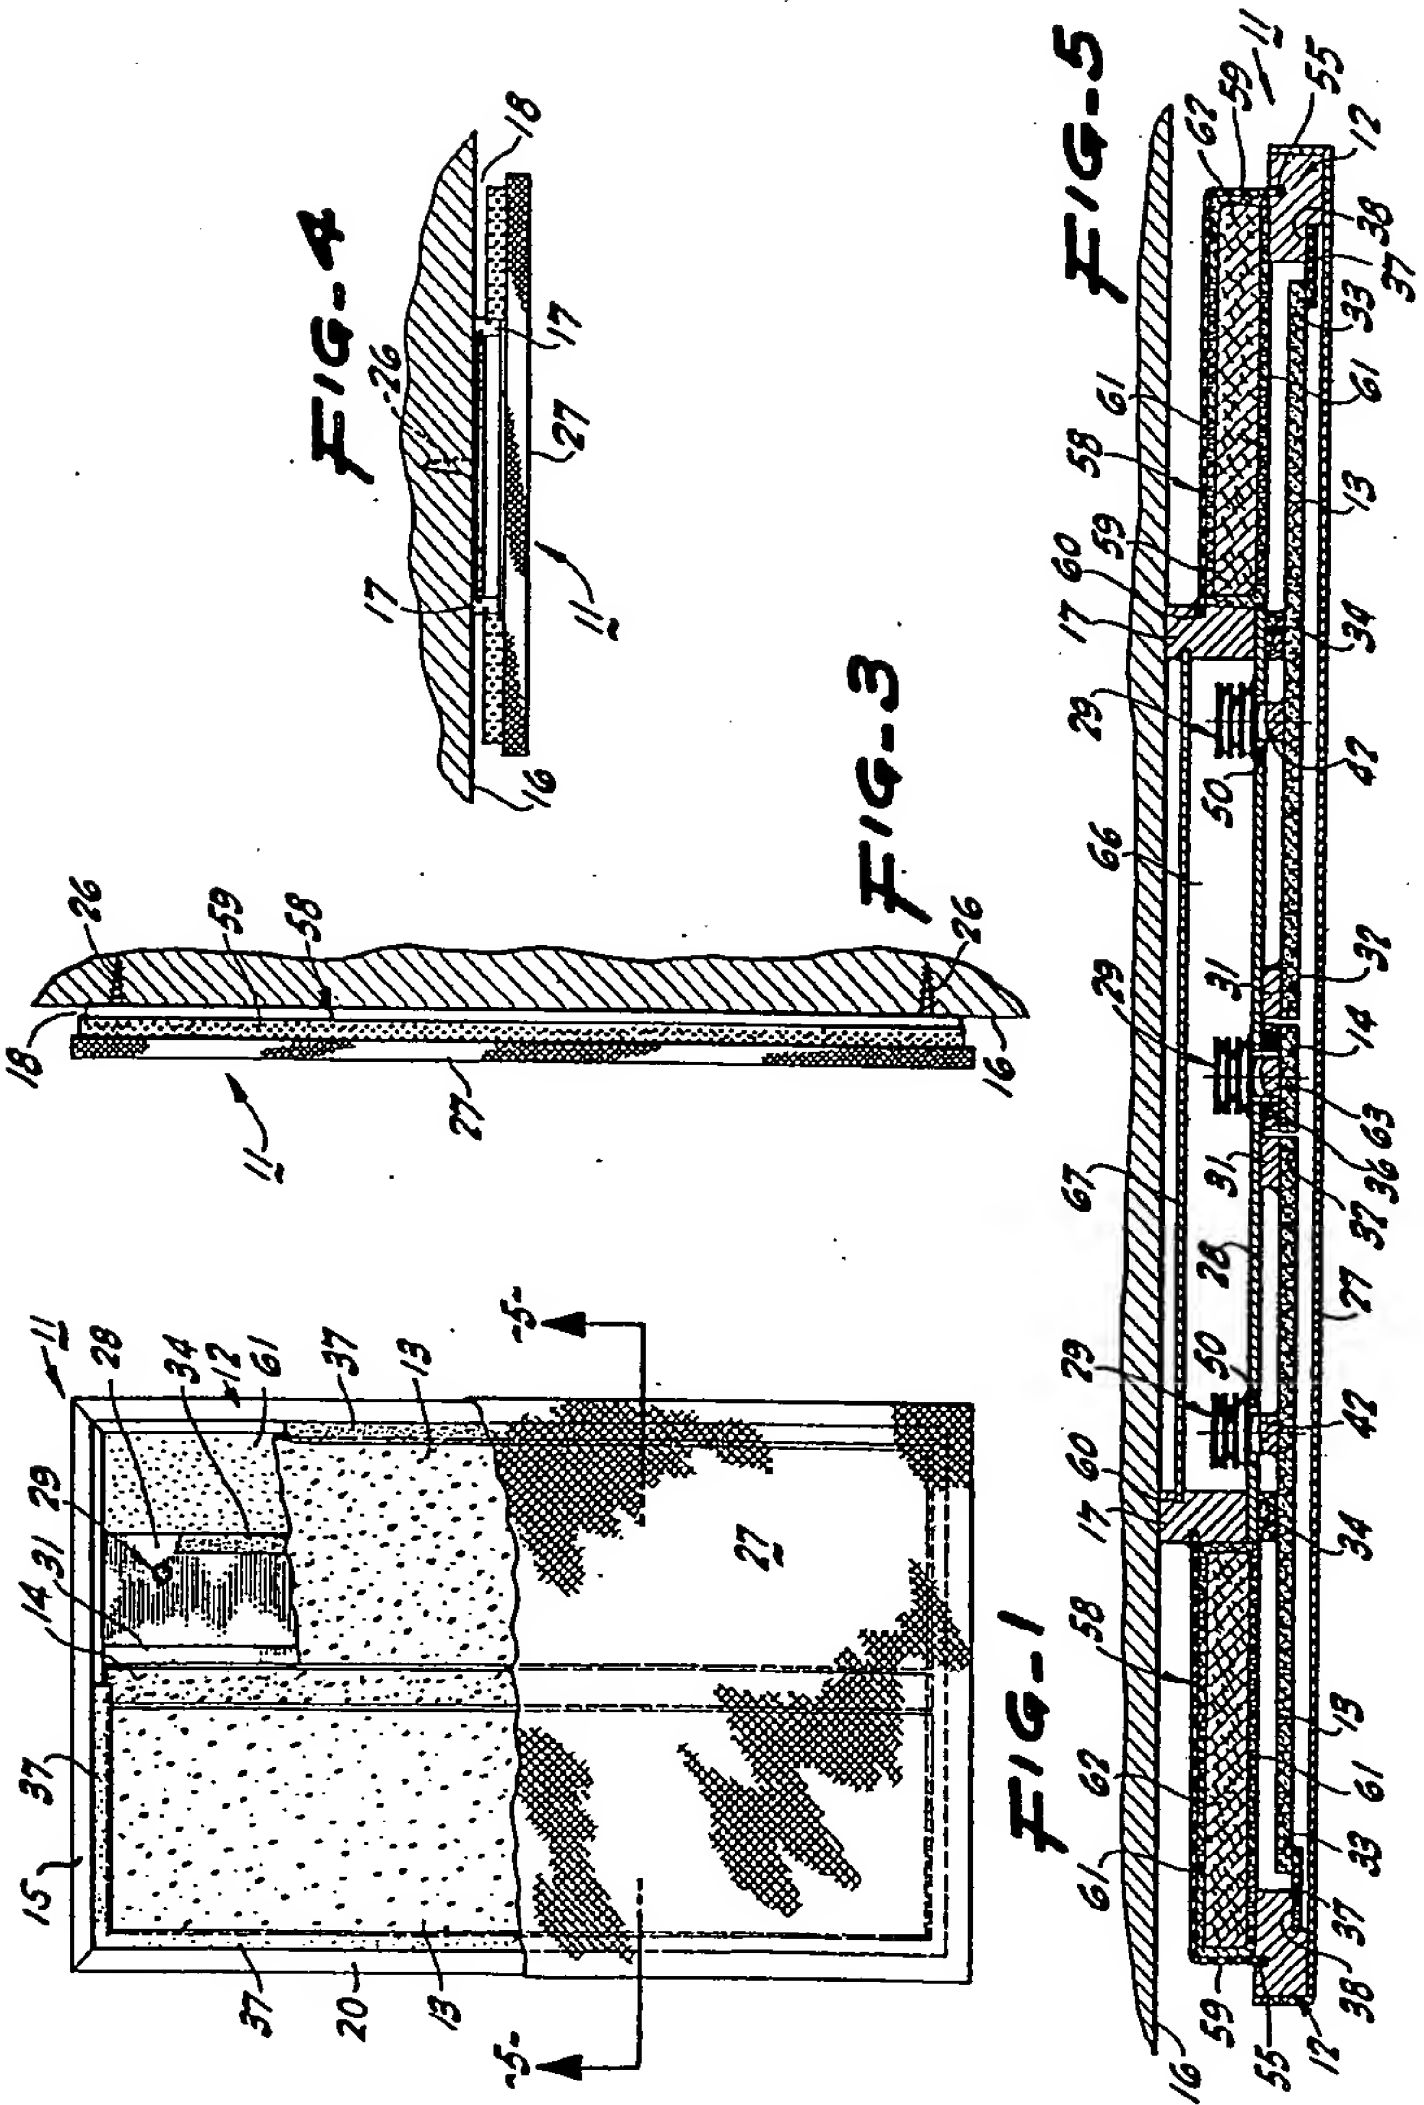


FIG-2

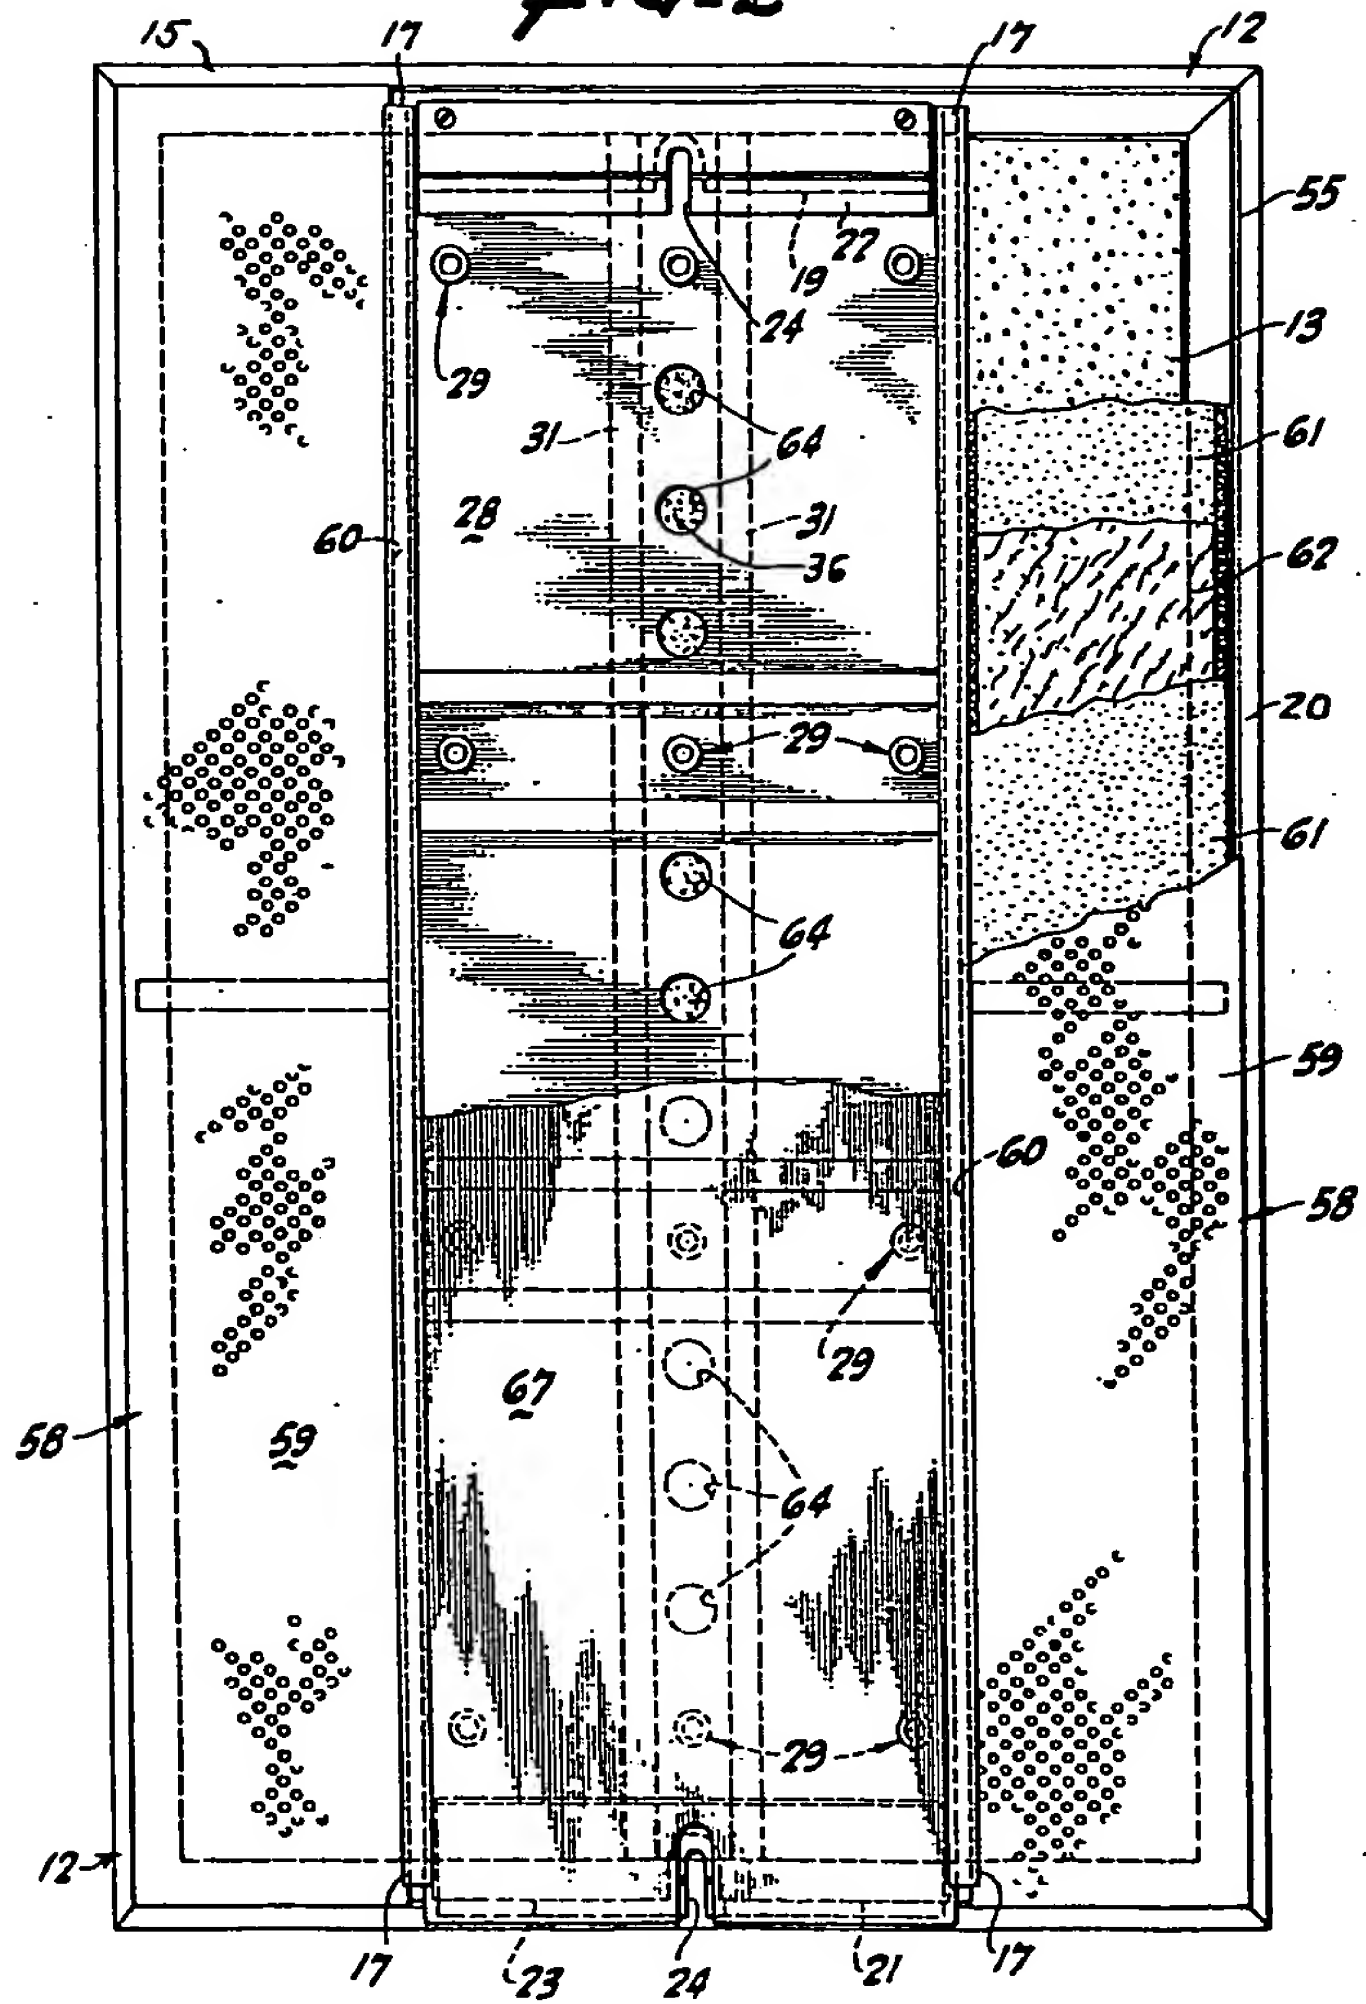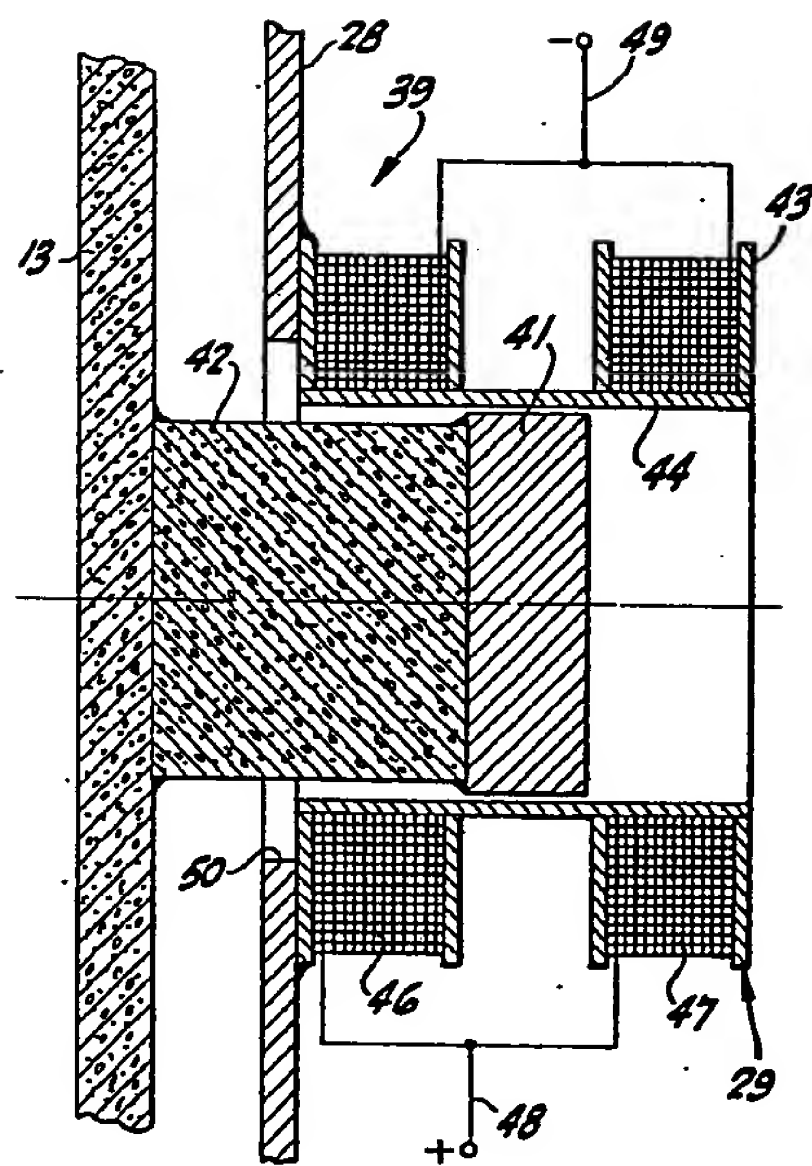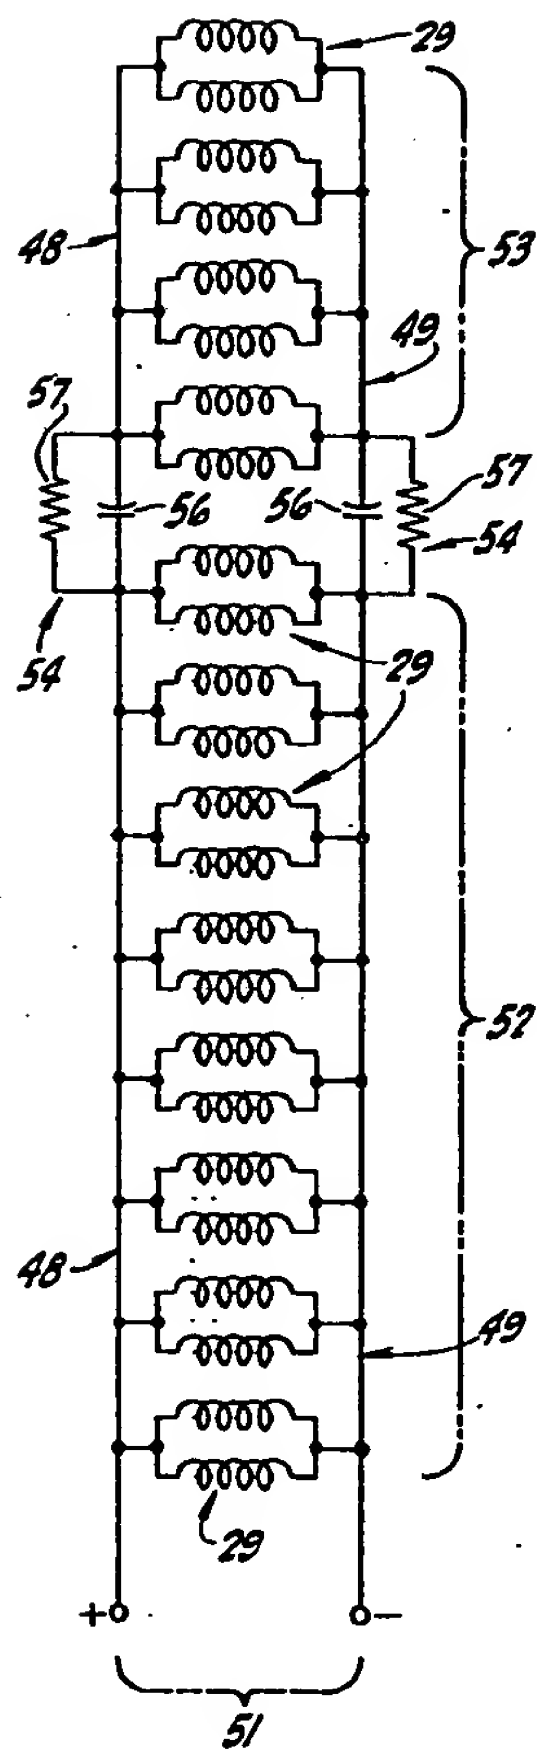

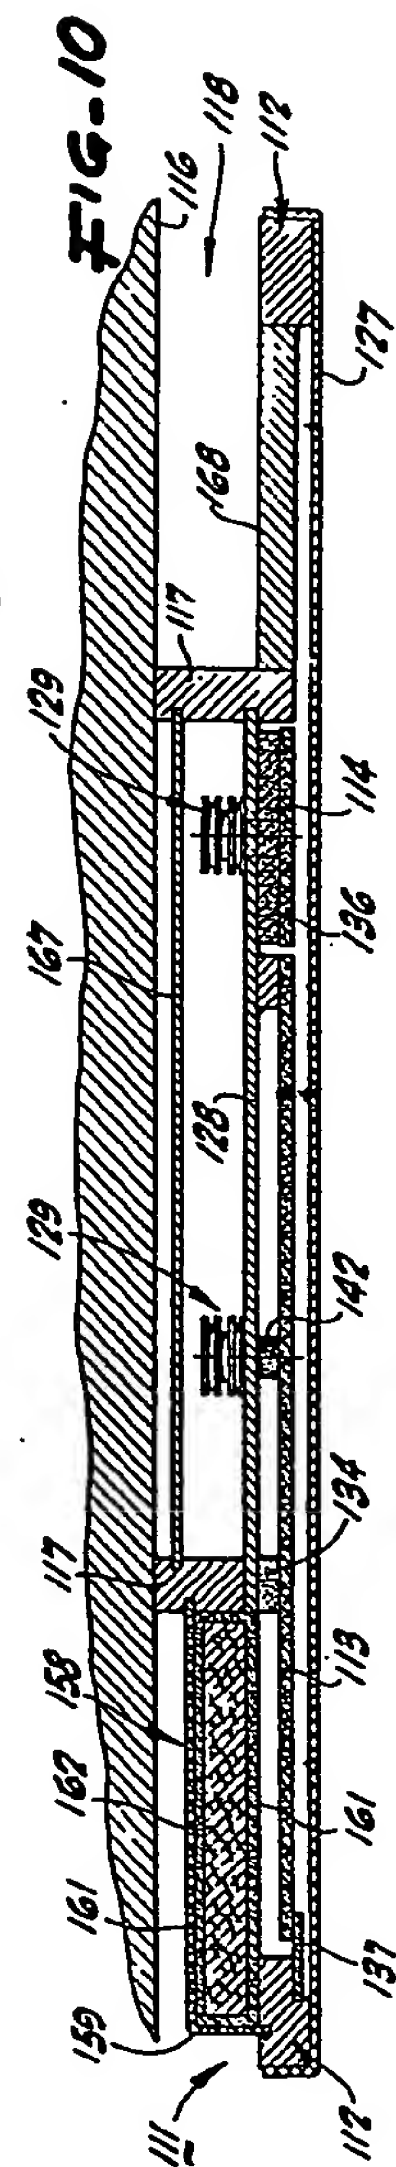

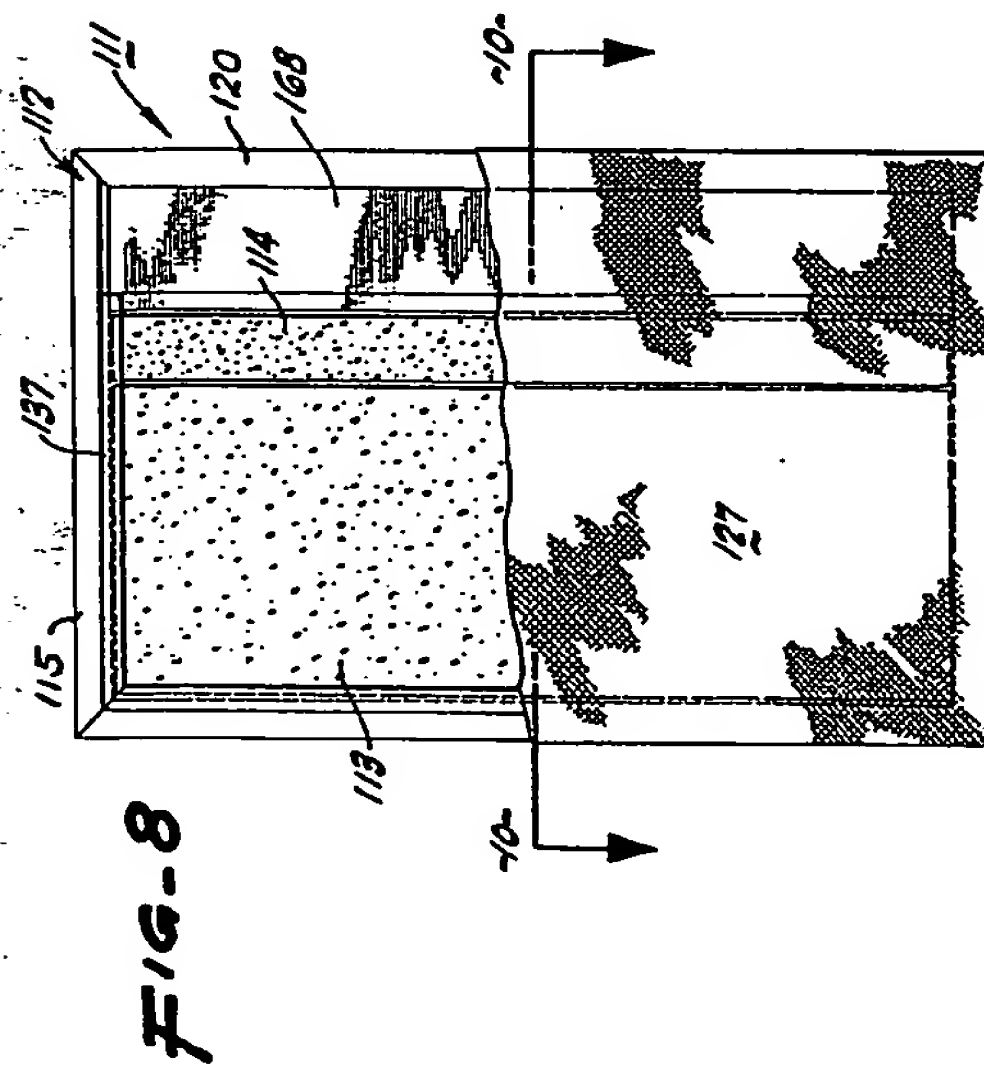

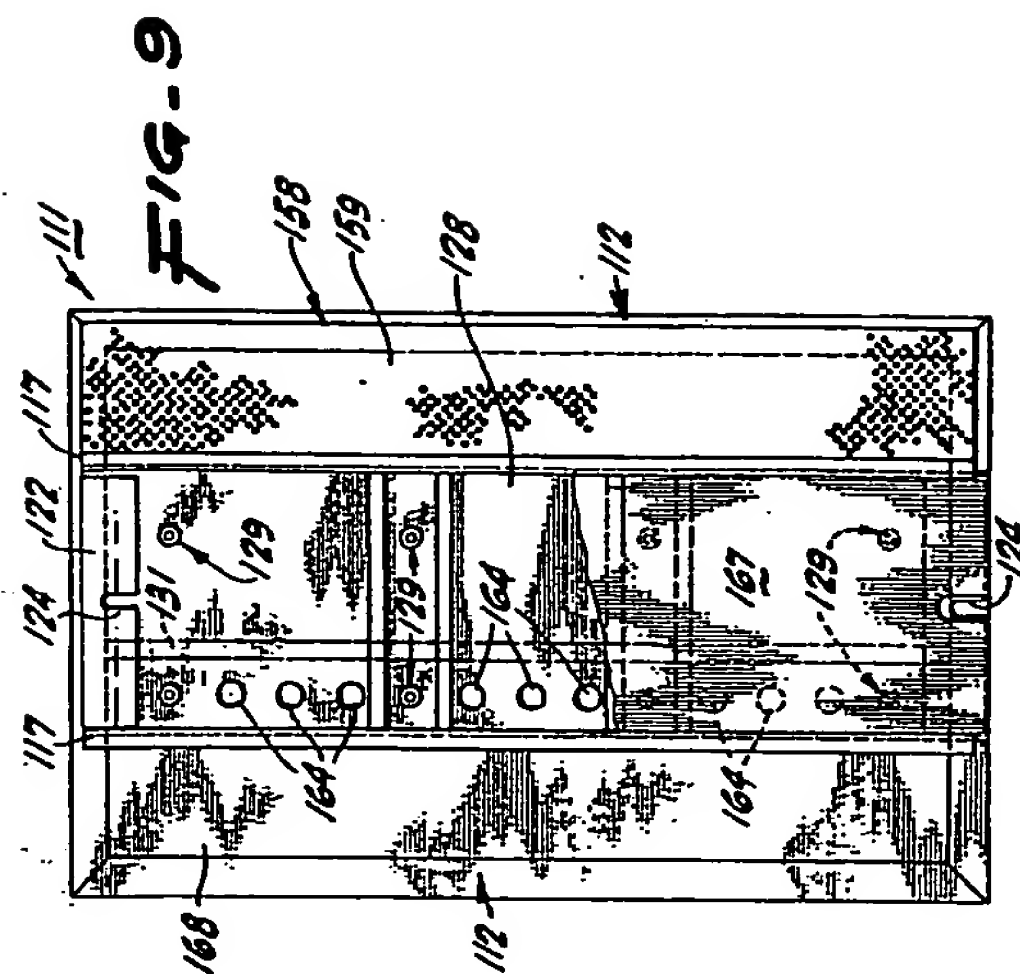

European Patent
Office

EUROPEAN SEARCH REPORT

0048434

Application number

EP 81 10 7275

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl.)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
	<u>GB - A - 1 045 807 (W.F. EWALD)</u> * page 3, lines 22-84; page 3, line 129 to page 4, line 41; figure 2 * ---	1,5,8	H 04 R 11/02 H 04 R 5/02 H 04 R 1/24
	<u>GB - A - 1 065 112 (M. STOLOW)</u> * page 1, line 70 to page 3, line 27; figures 1-4 * ---	1,5,8, 9	
	<u>US - A - 3 236 958 (A.B. COHEN)</u> * column 4, line 50 to column 8, line 21; figures * ---	1,4, 8-10	TECHNICAL FIELDS SEARCHED (Int. Cl.)
	<u>US - A - 3 268 672 (J.F. ROESEL et al.)</u> * column 2, line 9 to column 5, line 59; figures * ---	1,2,8, 9	H 04 R 11/00 H 04 R 11/02 H 04 R 9/56 H 04 R 5/02 H 04 R 1/24 H 04 R 1/26 H 04 R 7/04 H 04 R 7/06
	<u>US - A - 3 919 499 (J.M. WINEY)</u> * column 3, line 40 to column 6, line 6; column 8, lines 12-38; figures 1,2,8-11 * ---	1,2,5, 7,8	
	<u>US - A - 3 798 391 (R.J. PARKER)</u> * column 1, line 64 to column 3, line 10; figures; claims * -----	1,3	CATEGORY OF CITED DOCUMENTS
			X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons
			&: member of the same patent family, corresponding document
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
The Hague	12.12.1981	MINNOYE	